

ATC-C420


| DI | DO | AI | AO | RTD |
|----|----|----|----|-----|
| 12 | 4 | 2 | - | - |



Specifications

| | Model | ATC-C420-S | ATC-C420-B | ATC-C420-W |
|---------|-----------------------|---------------------|------------|------------|
| Digital | Input Range | Photo-Coupler | | |
| | Input Voltage | DC 24V | | |
| | Output Range | Relay Contact | | |
| | Output Relay Capacity | 5A 250VAC, 5A 30VDC | | |
| Analog | Input Resolution | 10bit ADC | | |
| | Input Range | DC 0~20mA | | |
| | Output Resolution | - | | |
| | Output Range | - | | |
| RTD | Input Sensor | - | | |
| | Input Temperature | - | | |
| General | Power | DC 24V | | |
| | Usual Temperature | -10°C ~ +50°C | | |
| | Communication | RS-485 Serial | Bluetooth | WiFi |
| | Size | 115 x 90 x 40 mm | | |

Dimension

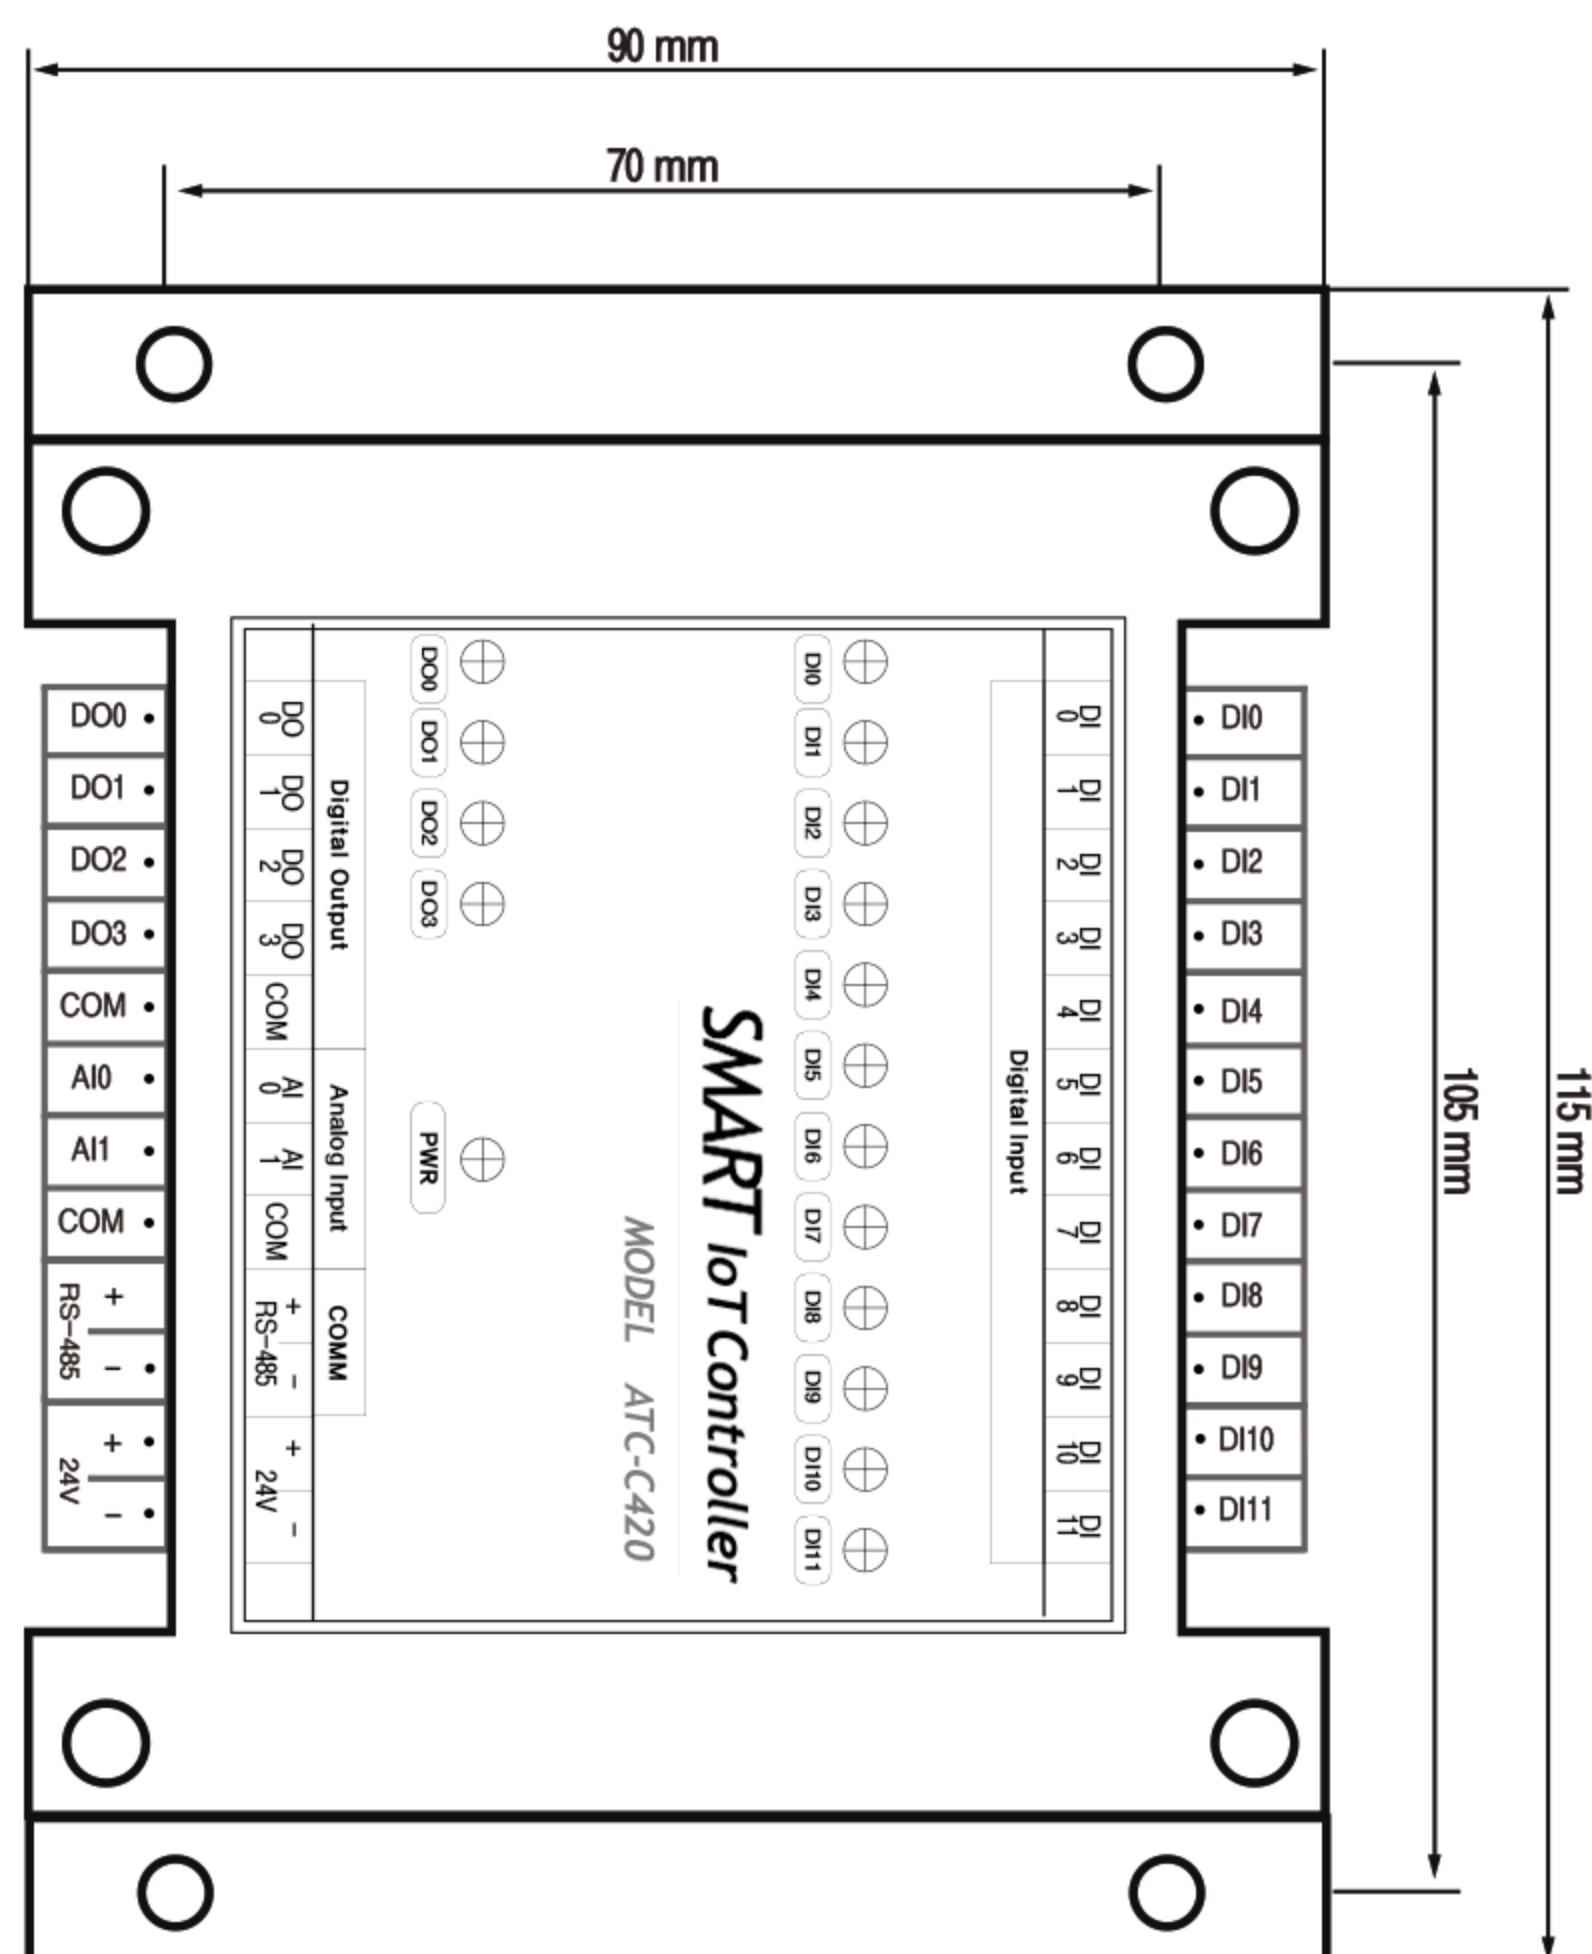

Configuration

